


CS-P80A150V4B/V4B+ REFERENCE SHEET






POWERED SUBWOOFER SPECS (CS-P80A150V4B)

- Low-Frequency Sub + Amp for Stereo L+R(150W max total) 35Wrms / 80Wmax Sub (mono), 16Wrms / 35Wmax x 2 (Stereo) Output
- 8"Treated Long-Throw Woofer
- Awesome Bass

- Speaker Sensitivity: 93dB 1W/1M Frequency Response 20Hz 20KHz, crossover freq 150Hz Dimensions: 8.5" round by 15.5" long High Performance Amp with treated/coated PCB for ultra reliability
- Includes strapping, feet, hardware and cables

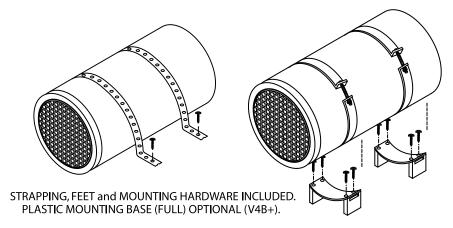



15.5" Version


!ATTENTION!


- Always test the performance of the subwoofer with the spa skirt/sides in place. Otherwise, poor bass performance may result. Although rare, please report all
- Although rare, please report all subwoofer damages from shipping immediately so that a claim may be made with the carrier. Do not use if there appears to be anything loose inside the subwoofer unit.
 Please call our Troubleshooting Hotline with any questions or suggestions at 1-704-658-9617.



www.vidsonix.com www.marinavox.com

Specifications subject to change due to design improvements.





- 1. Use FRONT or REAR channel (L,R) RCA LOW LEVEL OUTPUTS from a head unit OR 3.5mm headphone jack to RCA OUTPUTS from MP3, IPOD, or portable AM/FM/CD player into LINE IN on SUB AMP. **OUTPUT:**
- Use supplied cable to connect satellite speakers.
 Speaker load should be > 3 ohms per channel.

HOUSINGS WITH MP3/IPOD INPUTS AVAILABLE SEPARATELY.

*CONNECT THE DC GROUND ALSO TO THE AC GROUND OF THE SPA POWER PAK IF YOU ARE EXPERIENCING ANY NOISE ISSUES.